




TRAFFIC SAFETY SUPPLY COMPANY


Your Traffic Sign & Supplies Resource Since 1956

V-LOC ANCHORS


**NCHRP 350
OR MASH
COMPLIANT**



Concrete Anchors

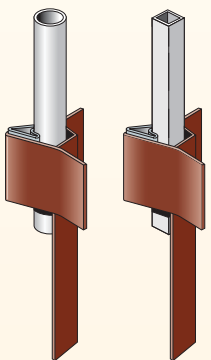

Normal Soil Anchors

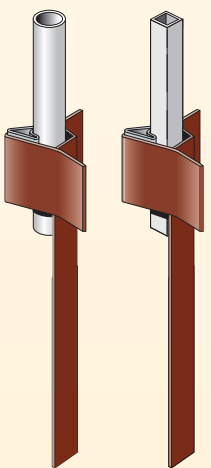

Loose Soil Anchors


V-LOC SIGN SUPPORT ANCHORING SYSTEM

V-Loc® is a heavy-duty, permanent, state of the art, re-usable breakaway anchor. It mounts posts for signs, mailboxes and other applications flush to the ground for unequaled safety.

The V-Loc socket can be installed in concrete, asphalt or dirt safely by one man in a matter of minutes either by hand or power driver. The strong steel fins hold the socket securely in the ground, resisting movement from wind vibration. After a knock-down, the socket is reusable, requiring only the replacement of the locking wedge.

V-Loc's flush-to-the-ground configuration allows sign posts to break off cleanly at ground level, with a 360° impact zone.

You won't find a simpler, safer, more durable, functional and economical post anchor than V-Loc. We offer many types of models to suit almost any condition. Choose the type of V-Loc that matches your soil or pavement type and post type.

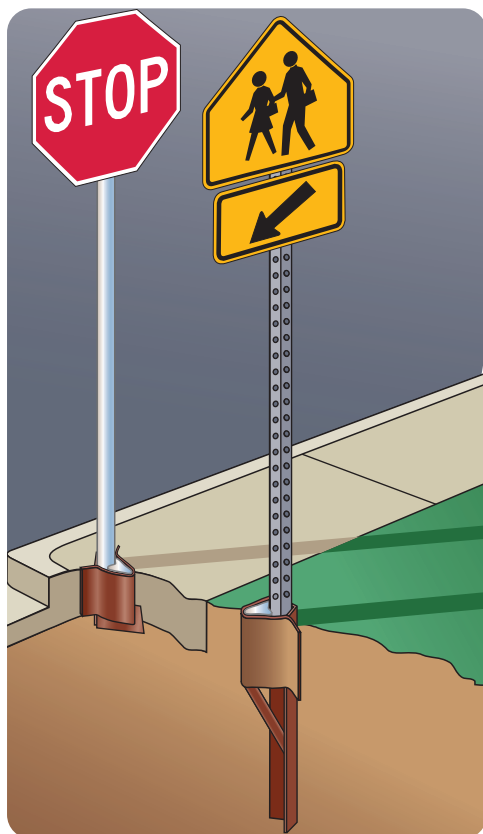


PIPE POSTS MODELS						
Model	Product Number	Wt./Unit (pounds)	Post OD (inches)	Leg Angle	Fin Dimensions	Application
23-VR1	#11502302	5.00	2.375	2.5 x 2.5 x .25 x 8"	8 x 9.25 x 12 ga.	Concrete
23-VR2	#11502300	12.80	2.375	2.5 x 2.5 x .25 x 24"	10 x 15 x 12 ga.	Normal Soil
23-VR3	#11502301	14.80	2.375	2.5 x 2.5 x .25 x 30"	10 x 15 x 12 ga.	Loose Soil
SQUARE TUBE MODELS						
175-VS1	#11500980	4.40	1.75	2 x 2 x .25 x 8"	8 x 9.25 x 12 ga.	Concrete
175-VS2	#11500981	10.00	1.75	2 x 2 x .25 x 24"	10 x 12 x 12 ga.	Normal Soil
175-VS3	#11500982	11.60	1.75	2 x 2 x .25 x 30"	10 x 12 x 12 ga.	Loose Soil
200-VS1	#11501000	5.00	2.00	2.5 x 2.5 x .25 x 8"	8 x 9.25 x 12 ga.	Concrete
200-VS2	#11501001	12.80	2.00	2.5 x 2.5 x .25 x 24"	10 x 12 x 12 ga.	Normal Soil
200-VS3	#11501002	14.80	2.00	2.5 x 2.5 x .25 x 30"	10 x 12 x 12 ga.	Loose Soil

V-LOC TOOLS & DRIVERS

V-LOC GALVANIZED STEEL WEDGE

Fits all V-LOC Models
11502000

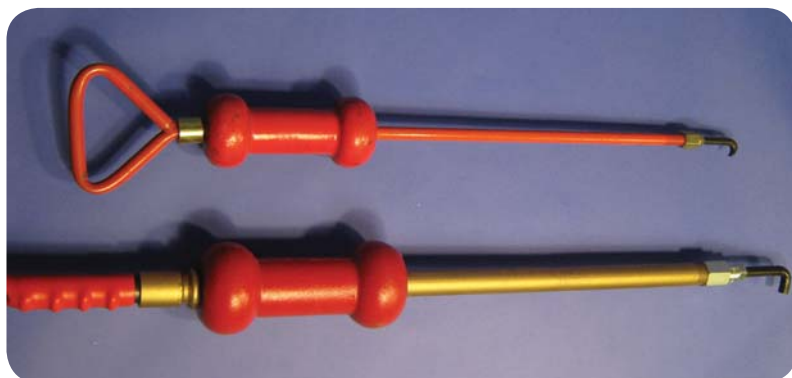

LIGHT DUTY WEDGE PULLER

11501400
Replacement Hook #11501502
Replacement Nut #11501503

HEAVY DUTY WEDGE PULLER

11501450
Replacement Hook #11501510
Replacement Nut #11501515



POWER DRIVER FOR V-LOC ANCHORS

7/8" x 3-1/4" Shank with V-Loc Power Drive Cap #11502005
1" x 4-1/4" Shank with V-Loc Power Drive Cap #11502010
1-1/8" x 6" Shank with V-Loc Power Drive Cap #11501504
1-1/4" x 6" Shank with V-Loc Power Drive Cap #11502015



MANUAL DRIVE CAP
For sledge driving #11501500

Proper shank size is determined from two measurements:

- (A) Hex diameter across two opposite flats.
- (B) Length of Hex portion of shank.

Dim A



Dim B

